

SR 167 Sumner


Milepost 6.86 to 11.44

SR 167 Sumner


Length: 4.58 miles
 Median width: 84 feet
 Speed limit: 60 mph
 Barrier type: High-tension
 Year installed: 2006

Average annual daily traffic volume

Vehicles per day by year

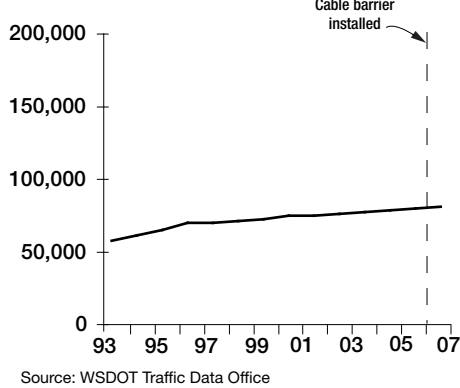

ADT average growth rate on segment is 3 percent per year.

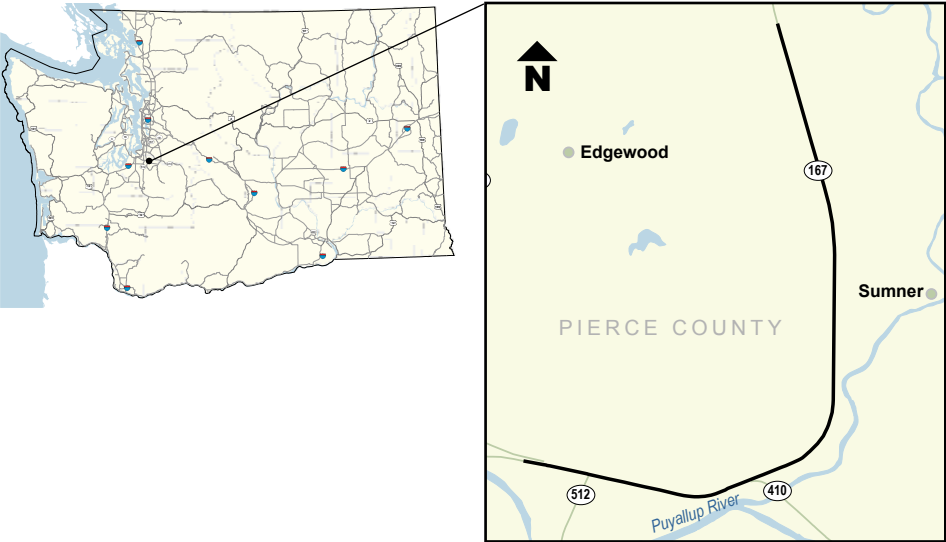

| SR 167 Sumner | No injury | Possible injury | Evident injury | Serious injury | Fatality |
|--|-----------|-----------------|----------------|----------------|----------|
| All median collisions before (60 months) | 28 | 9 | 6 | 2 | 0 |
| All median collisions after (19 months) | 16 | 3 | 1 | 0 | 0 |
| Cross median collisions before (60 months) | 1 | 0 | 1 | 0 | 0 |
| Cross median collisions after (19 months) | 0 | 0 | 0 | 0 | 0 |

The cable median barrier generally is located 12 feet from the edge of the northbound lanes.

No cross-median incidents have occurred since we installed this cable median barrier.

